# Winger Electronics WEBNW10-CW 3mm neutral-white DIP LED








## **Description**

- 3mm DIP LED
- Wide beam angle (40°)
- Emitting Color: Warm-white

## **Dimension figure**

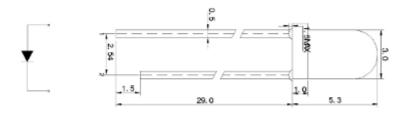



Unit: mm

Tolerances: ±0.25mm

### **Absolute Maximum Ratings**

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	I <sub>F</sub>	20	mA
Peak Forward Current *	I <sub>FP</sub>	100	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	Po	80	mW
Operating Temperature	T <sub>OPR</sub>	-30 ~ +80	°C
Storage Temperature	$T_{stg}$	-30 ~ +80	°C
Lead Soldering Temperature	T <sub>SOL</sub>	Max. 5 sec @ 260	°C

\*I<sub>FP</sub> Conditions: 1/10 Duty Cycle, 10ms Puls Width

### **Typical Optical/Electrical Characteristics**


Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	2,8	3,2	3,6	V
50% Power Angle			-	40	-	deg
Liminous Intensity	I <sub>V</sub>		6200	-	10000	mcd
Dominant Wavelength	$\lambda_{D}$		-	-	-	nm
Color Temperature	Тс		4000	4500	4800	K
Recommended Forward Current	I <sub>F(rec)</sub>		-	-	20	mA
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA

#### Notes:


- 1. It's strongly recommended to limit die temperature to 55°C
- 2. Absolute maximum ratings Ta=25°C
- 3. Measurement Tolerances of Forward Voltage ±0.1V
- 4. Measurement Tolerances of peak wavelength ±2.0nm
- 5. Measurement Tolerances of luminous intensity ±15%
- 6. Measurement Tolerances of angle intensity ±15%

### Typical electrical and optical characteristics


Forward Current vs. Ambient Temperature




Relative Intensity vs. Ambient Temperature




Forward Ourrent vs. Forward Voltage




Forward Voltage vs. Ambient Temperature



### **Spatial Distribution**

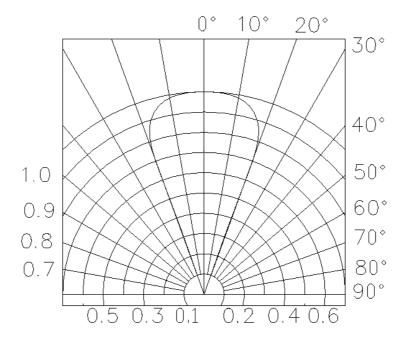

#### Spectrum

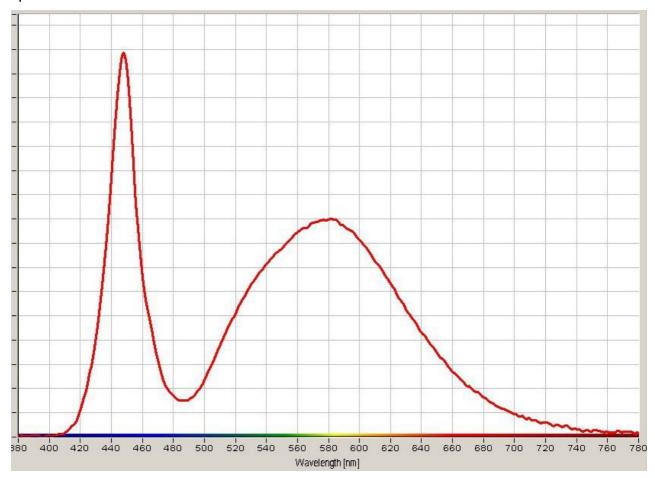

### Warranty

Perform an acceptance inspection on arrival of the goods. Return the defectives if any stipulating the disqualification and quantity.

Embedding the LEDs into the application and the verification of life and other qualities in practical use shall be executed by user.

Seller shall not bear responsibility for any damages or defects caused by improper operation at the current in excess of the absolute maximum ratings that are not covered by warranty.