WINGER® WEEUV00-CS LED 5 mm UV-A, typ. 370 nm

Item number	50437000
Type	WEEUV00-CS
Brand	WINGER®
Package	5 mm, water clear
Emitted colour	UV-A, typ. 370 nm
Radiant intensity	I_e on request
Viewing angle	25°



The WINGER® WEEUV00-CS is a through-hole UV-A LED in the widely used 5 mm standard package with a water-clear lens. It emits UV-A radiation at a typical wavelength of 370 nm with a viewing angle of 25°. A radiant intensity I_e in mW/sr is not stated in the available sources (on request). The shop table and the previous datasheet version list a photometric luminous intensity of up to 50 mcd.

Typical uses are technical and analytical applications, phototherapy and microscope lighting. UV radiation can be harmful to eyes and skin; see the handling notes.

1 Optical and Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage [2]	V_F	3.4 [1]	3.2 [2]	3.6 [1]	V	I_F = 20 mA
Viewing angle (50 % power angle)	2θ½		25		°	I_F = 20 mA
Radiant intensity [6]	I_e		on request	on request	mW/sr	I_F = 20 mA
Luminous intensity [6]	I_V	30 [1]	40 [1]	50	mcd	I_F = 20 mA
Peak wavelength [5]	λ_P	365 [1]	370	370 [1]	nm	I_F = 20 mA
Recommended forward current	$I_{F(rec)}$			20 [1]	mA	
Reverse current	I_R			1 [1]	µA	V_R = 5 V

[1] Value according to the previous datasheet version.
[2] Typical forward voltage 3.2 V according to the shop (takes precedence). The previous datasheet version stated V_F = 3.4 / 3.5 / 3.6 V. The shop typical value lies below that minimum (clarification case; values not smoothed).
[5] Typical wavelength 370 nm according to the shop (stated as 370 nm ±5 nm). The previous datasheet version stated λ_D = 365 / 367.5 / 370 nm. The English shop URL uses “365-375nm”, the German title “365-370nm”.
[6] The shop title states “4 mW” (no solid-angle unit). The shop specification table and the previous datasheet version list a luminous intensity of max. 50 mcd (previous typ. 40 mcd, min. 30 mcd). No radiant intensity I_e in mW/sr is given in the sources, so I_e is marked “on request”. The 4 mW figure is not used as I_e.
Unless otherwise stated, values at I_F = 20 mA, T_A = 25 °C.
Measurement tolerances [1]: forward voltage ±0.1 V; radiant or luminous intensity ±15 %; viewing angle ±15 %; wavelength ±2.0 nm.
It is strongly recommended to limit the die temperature to 55 °C [1].


2 Absolute Maximum Ratings

Parameter	Symbol	Rating
Forward current	I_F	20 mA [1]
Peak forward current (duty cycle 1/10, pulse width 0.1 ms)	I_{FP}	50 mA [1]
Reverse voltage	V_R	5 V [1]
Max. power dissipation	P_D	80 mW
Operating temperature range	T_{OPR}	−25 ... +80 °C [1]
Storage temperature range	T_{STG}	−35 ... +105 °C [1]
Lead soldering temperature	T_{SOL}	260 °C for max. 5 s, 3 mm from the epoxy base [1]


[1] Value according to the previous datasheet version.
Absolute maximum ratings at T_A = 25 °C.

3 Characteristic Curves

Forward current vs. forward voltage

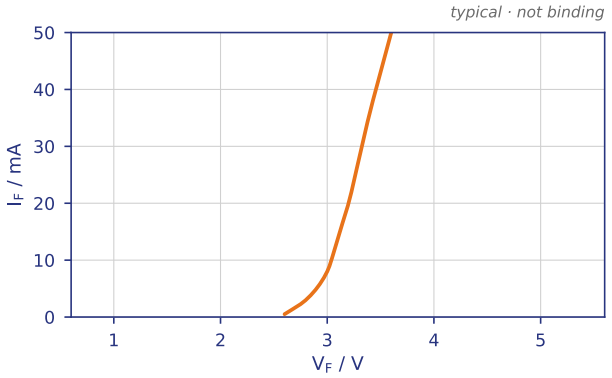


Relative spectral emission

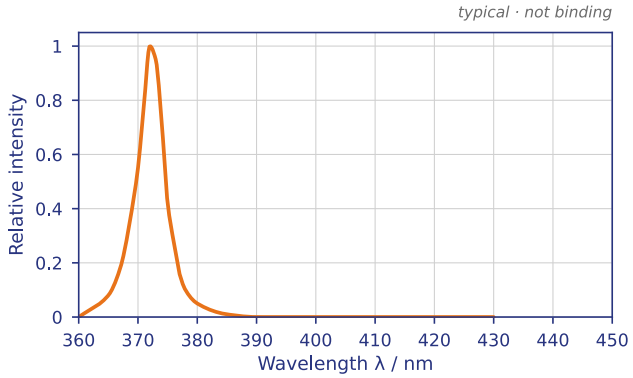

Typical curves taken over from the previous datasheet version (read graphically, approximate values) – not binding; the table values apply. Spectrum normalised to its maximum (peak approx. 372 nm). I_F–V_F agrees approximately with typ. V_F = 3.2 V at 20 mA. Derating, $I_V(T_A)$ and the radiation characteristic were omitted.

4 Mechanical Data

Parameter	Value
Package	5 mm round, through-hole, water-clear lens
Body diameter	Ø 5.0 mm
Flange diameter	Ø 5.8 mm
Body height (flange to lens tip)	8.7 mm
Height from flange front face to lens tip	7.7 mm
Lead spacing / lead cross-section	2.54 mm / 0.54 mm
Lead length	≥ 25 mm (anode; cathode shorter)
Polarity	long lead = anode (+); short lead and flat on flange = cathode (−)
General tolerance	±0.25 mm [1]

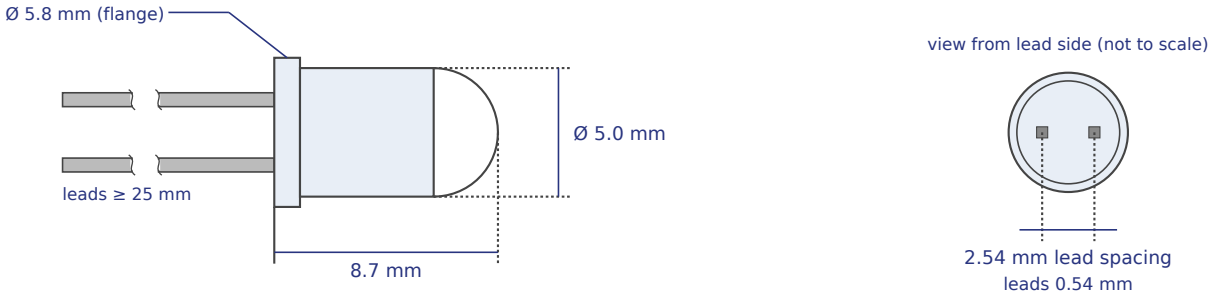

Side view (schematic, not to scale). Long lead = anode, flat on flange = cathode side.

[1] Value according to the previous datasheet version.
Dimensions in mm, taken from the product-page drawing (shop). Lead thickness is the single dimension shown on that drawing (not stated as a square cross-section). The 1.5 mm dimension on the shop drawing marks the stepped lead end, not a shortening of the cathode; the cathode is drawn shorter but is not dimensioned. The previous datasheet version stated body Ø 4.9 mm (front view Ø 5 mm), lead thickness 0.5 mm, lead length MIN 25.0 mm and a cathode difference written “2.0~1.0 mm” (typographically unclear). General tolerance ±0.25 mm according to the previous datasheet version [1].

5 Ordering Information and Packaging

Parameter	Value
Item number	50437000
Type	WEEUV00-CS
Packaging	loose in bag
Packaging unit	500 pcs per bag

6 Handling and Application Notes

- Always operate the LED with a current-limiting series resistor or a constant-current source – never connect it directly to a voltage source. Series resistor: $R = (U_{supply} - V_F) / I_F$.
- When connecting LEDs in parallel, use a separate series resistor for each LED or string.
- Do not exceed the absolute maximum ratings, not even briefly; avoid reverse voltage.
- Bend the leads only before soldering and at room temperature, never directly at the body (typ. at least 3 mm [4] from the body). Hold the lead firmly between body and bending point; never use the body as a fulcrum.
- Do not apply mechanical stress to the leads or the lens while the LED is hot (during and directly after soldering). Let it cool down to room temperature first.
- Clean with isopropyl alcohol only if necessary; do not use aggressive solvents. Ultrasonic cleaning only after prior qualification.
- Do not look directly into the LED at short distance for a longer period (glare).
- Protect the LED against current surges and overvoltage; limit the die temperature to 55 °C (strongly recommended) [1].
- UV radiation: protect eyes and skin. Do not look directly into the operating LED; use suitable eye and skin protection. [4]

[1] Value according to the previous datasheet version.
[4] Typical value for this LED type; not individually measured / subject to confirmation.

7 ESD Protection

Parameter	Value
ESD withstand voltage (HBM)	1,000 V [4] (HBM, ANSI/ESDA/JEDEC JS-001)

- LEDs are electrostatic-sensitive devices (ESD). Electrostatic discharge or voltage surges can damage the LED immediately or reduce its service life without visible signs.
- Handle and process only in an ESD protected area (EPA) in accordance with IEC 61340-5-1: grounded work surfaces, equipment and soldering irons, wrist straps or ESD gloves, ESD-safe packaging and transport containers.
- Keep the LEDs in their ESD-safe packaging until processing.

[4] Typical value for this LED type; not individually measured / subject to confirmation.

8 Soldering Instructions

Parameter	Value
Wave soldering	max. 260 °C, max. 5 s, at least 3 mm from the body [4]
Preheating (wave soldering)	max. 100 °C, max. 60 s [4]
Hand soldering	max. 350 °C, max. 3 s, at least 3 mm from the body, once only [4]

- Recommended methods: wave soldering or hand soldering. Through-hole LEDs are not intended for reflow soldering unless explicitly stated.
- Solder only once if possible and keep the specified minimum distance between soldering point and body. Never dip the body into the solder.
- Hand soldering: use a temperature-controlled, grounded soldering iron; do not touch the body with the tip.
- Shorten the leads preferably after soldering and without transferring stress to the body.

[4] Typical value for this LED type; not individually measured / subject to confirmation.

9 Storage

Parameter	Value
Storage temperature	−35 … +105 °C
Recommended storage conditions	≤ 30 °C, ≤ 60 % RH, in original packaging [4]
Shelf life	12 months from delivery in unopened original packaging [4]

- Store in the original packaging in a dry, clean environment free of corrosive gases. Avoid condensation and rapid temperature changes.
- High humidity or sulphur-containing atmospheres can discolour the lead surface and impair solderability; process the LEDs promptly.

[4] Typical value for this LED type; not individually measured / subject to confirmation.

10 Environmental Compliance

Parameter	Value
RoHS (EU) 2011/65/EU incl. (EU) 2015/863	compliant (Directive 2011/65/EU) [3]
REACH (EC) 1907/2006	no SVHC of the candidate list above 0.1 % (w/w) known [4]

Declarations of conformity are available on request.
Dispose of as electronic waste in accordance with local regulations.

[3] RoHS compliance according to the previous datasheet version.
[4] Typical value for this LED type; not individually measured / subject to confirmation.

11 Warranty and Application Limits

- Perform an acceptance inspection on arrival of the goods; return defective items stating the defect and quantity.
- Integration of the LEDs into the application and verification of service life and other qualities in practical use shall be carried out by the user.
- Do not use the LEDs in applications requiring higher reliability and safety where failure or malfunction could endanger life or health. The seller assumes no liability for claims or damages resulting from use contrary to the intended purpose or without written consent.
- The seller assumes no responsibility for damage or defects caused by operation at currents exceeding the absolute maximum ratings; these are not covered by warranty.

Values marked [4] are typical values for this LED type and have not been individually measured for this item; they are subject to confirmation. Please contact us for binding values: info@led1.de · +49 340 8508260.

Winger Electronics GmbH & Co. KG · LED1.de® · Sold only to businesses, public authorities, schools and freelancers. “LED1.de” and “WINGER” are registered trademarks. Status: November 2026 – Subject to technical changes and errors.